



TILE SPACERS فواصل تسوية البلاط




CLIPS PART A

2-part system (sold separately)
For Tiles up to 1/2" Thick

WEDGES PART B

A

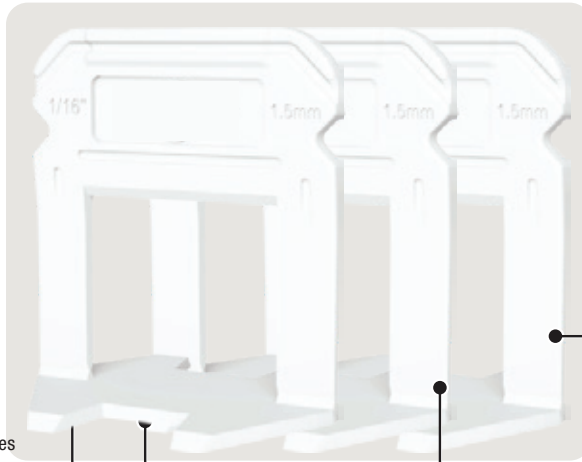

LEVEL

Flat base maximizes adhesive coverage and ensures tile surface is lippage-free

4 CLIP SIZES

Available in four popular grout widths
1/32", 1/16", 1/8" and 3/16"

DESIGN

Notches on each side of the clip allow mortar to dispense evenly to eliminate potential voids

TILE SIZE

Accommodates tiles up to 1/2" thick




HOLD

Wide wedge design holds tiles securely while mortar dries

B

COST EFFECTIVE

Reusable 7/8" wide wedge

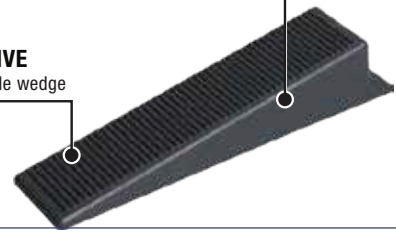

The Tile Leveling System was developed out of a need to diminish costly mistakes due to unlevelled tiles causing lippage in high-end installations. It is the perfect system to use with tile plank and large-format rectified porcelain, marble and stone and the flat base design is ideal for wall tile installations. This time saving system adjusts the height of the tiles and evenly holds their edges throughout the curing process. It is the most cost effective installation method on the market to eliminate lippage.

The Tile Leveling System comes in 4 clip sizes, 1/32", 1/16", 1/8" and 3/16", and provides narrow grout lines for tiles up to 1/2" thick.

*25% longer blade life, Proven by 3rd party independent testing.





TILE SPACERS فواصل تسوية البلاط



Slide two clips under the tile and into the mortar approximately 2" from each end of the tile. Place the second clip.



Slide the reusable wedges into the clips to level, align, space and hold the tiles.




Once mortar has set, simply tap the clips with a non-marring rubber mallet to snap off at the specially designated break-points. Save wedges for future use.

The Wall & Floor Tile Leveling System should be used with a minimum 1/2" x 1/2" x 1/2" square trowel notch to apply the setting material. Back buttering your tile is always recommended.

Type	Quantity	Type	Quantity
A 1mm	16/Box (200/bag)	B	10/Box (200/bag)
A 1,5 mm	16/Box (200/bag)		
A 2 mm	16/Box (200/bag)		
A 2,5 mm	16/Box (200/bag)		
A 3 mm	16/Box (200/bag)		

MADE IN KSA

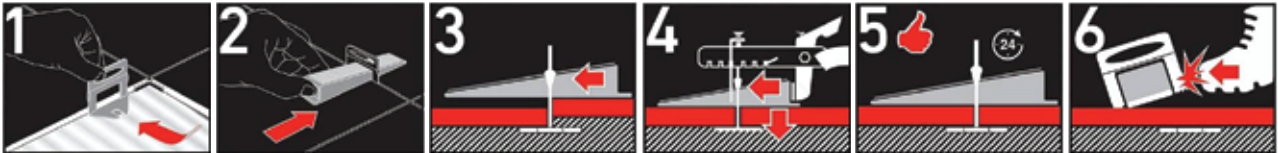



فواصل تسوية البلاط TILE SPACERS



فواصل تسوية البلاط
TILE SPACERS

3MAX

ISO 9001
ISO 45001
ISO 14001
AQSR
USAC

200P
كرتون 10 كيس

200P
كرتون 16 كيس

وصف المنتج:
فواصل تسوية لأسطح البلاط بطريقة مثالية

المواصفات:
✓ الحصول على بلاط مستوي تماما ومتوازن بدون أي فروقات
✓ سهل الفك والتركيب
✓ تكلفة بسيطة لفائدة كبيرة
✓ سهولة الاستخدام وتوفير في وقت التركيب

أماكن الاستخدام:
• بلاط الارقيات والجدران
• البلاط ذو السماكات المنخفضة والحجم الكبير

www.3max.com.sa

REUSABLE
IDEAL LEVEL

VISION 2030
صناعة سعودية

200P
كرتون 10 كيس

3MAX

200P
كرتون 16 كيس

وصف المنتج:
فواصل تسوية لأسطح البلاط بطريقة مثالية

المواصفات:
✓ الحصول على بلاط مستوي تماما ومتوازن بدون أي فروقات
✓ سهل الفك والتركيب
✓ تكلفة بسيطة لفائدة كبيرة
✓ سهولة الاستخدام وتوفير في وقت التركيب

أماكن الاستخدام:
• بلاط الارقيات والجدران
• البلاط ذو السماكات المنخفضة والحجم الكبير

www.3max.com.sa

VISION 2030
صناعة سعودية

GUARANTEED QUALITY
ISO 9001
ISO 45001
ISO 14001
AQSR
USAC
QUALITY GUARANTEE

